



Refrigerated Cold Pans

Model

E-SL-CP3-2

E-SL-CP3-3

E-SL-CP3-4

STANDARD FEATURES

- 3" recessed top edge to comply with NFS-7 requirements
Self contained drop-in design
- Hold standard 12" by 20" food pans and fractional sized pans
Meets NSF Standard 7
- Stainless steel top and liner for maximum strength and durability
1" drains for ease of cleaning
- On-off switch with 8 ft. cord & plug for ease of installation and operation
- Type 134A or 404A CFC free refrigerant
- Fully insulated, CFC free, foamed-in place insulation
- keeps food cold while saving energy
Recessed ledge for pan support and colder, fresher products
- Quick & easy service with sight glass, service valves, filter/dryer and receiver

DESCRIPTION

Refrigerated Slim Line Drop-In Cold Pans are designed for narrow counters and hold pre-chilled food products at cold, fresh and safe serving temperatures. All models are completely self-contained in two, three or four-well models and are CFC free. Pans are recessed 3" to comply with NSF-7 performance requirements. Includes an 8 ft. 120V cord and plug (120V models).

SPECIFICATIONS

Exterior – One-piece top flange and coved-corner interiors constructed of 18 gauge stainless steel. Exterior body constructed of heavy gauge, corrosion resistant steel. Condensing unit mounted on corrosion resistant frame below the cold pan.

Interior – CFC free foamed-in-place insulation through-out, 1" drain located in the center for easy cleaning. Ledge is recessed 3" to comply with NSF-7 requirements, allowing a layer of air to insulate food and for pan support.

Refrigeration – Air cooled, type 134A or 404A CFC free refrigerant system featuring wrapped coil construction on both sides and bottom, individual thermostats, on/off switch, 8 ft. cord and plug set NEMA 5-15P (120V models). Refrigeration system features sight glass, easy service valves, dryer/filter and receiver.


Refrigerated Cold Pans

□ E-SL-CP3-2


□ E-SL-CP3-3

□ E-SL-CP3-4

Model E-SL-CP3-4
shown below

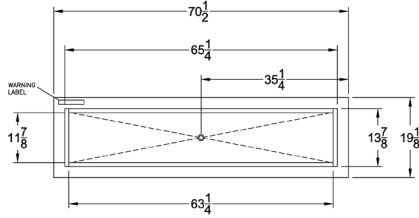


PLAN VIEW





SECTION THRU
SCALE: 1"=1'


Note: Specifications are subject to change without notice and are not intended for installation purposes. See installation instructions prior to installing the unit.




ADAPTER BAR
(2) REQ'D

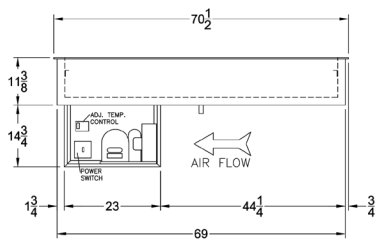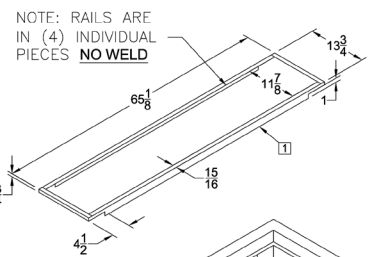

FRONT VIEW
(OPERATOR SIDE)



SIDE VIEW

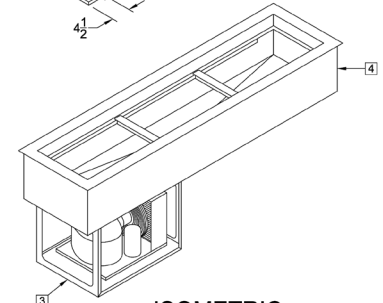

ISOMETRIC

SPECIFICATIONS

Model Number	OVERALL DIMENSIONS		INTERIOR DIMENSIONS		CUT OUT DIMENSIONS		
	A Front to Back Inches (MM)	B Left to Right Inches (MM)	C Height Inches (MM)	D Front to Back Inches (MM)	E Left to Right Inches (MM)	Width Front to Back Inches (MM)	Length Left to Right Inches (MM)
E-SL-CP3-2	19-1/8 (486)	49 (1244)	26-1/8 (664)	13-7/8 (352)	43-3/4 (1111)	17-7/8 (454)	47-3/4 (1213)
E-SL-CP3-3	19-1/8 (486)	70-1/2 (1790)	26-1/8 (664)	13-7/8 (352)	65-1/4 (1657)	17-7/8 (454)	69-1/4 (1756)
E-SL-CP3-4	19-1/8 (486)	92 (2336)	26-1/8 (664)	13-7/8 (352)	86-3/4 (2203)	17-7/8 (454)	90-3/4 (2305)

SHIPPING INFORMATION

Model Number	WEIGHTS		CARTON DIMENSIONS			CRATE SIZE	
	SHIPPING WEIGHTS POUNDS (KG)	SHIPPING WEIGHTS POUNDS (KG)	WIDTH INCHES (MM)	DEPTH INCHES (MM)	HEIGHT INCHES (MM)	CUBIC FEET	CUBIC METERS
E-SL-CP3-2	220 (100)	190 (86)	29 (737)	34 (864)	32 (813)	18.26	0.52
E-SL-CP3-3	240 (108)	210 (96)	29 (737)	48 (1219)	32 (813)	25.78	0.73
E-SL-CP3-4	275 (124)	240 (109)	29 (737)	62 (1575)	32 (813)	33.3	0.94

POWER SUPPLY

Model Number	VOLTS	HP	AMPS	PHASE	POWER SUPPLY	REFRIGERANT
E-SL-CP3-2	115	1/4	4.9	SINGLE	NEMA 5-15P	R-134-A
E-SL-CP3-3	115	1/3	5.6	SINGLE	NEMA 5-15P	R-404-A
E-SL-CP3-4	115	1/2	6.4	SINGLE	NEMA 5-15P	R-404-A