

Project:	AIA#
Item:	
Location:	SIS#
Approved:	

P-SERIES PASS-THRU WARMING CABINET

PH2 Solid Door Warming Cabinet

MODEL: PH2-1S-PT



3 Year Parts / Labor Warranty

CABINET CONSTRUCTION

- Stainless steel exterior
- Interior liner is made of corrosion resistant aluminum
- Operational indicator panel contains thermometer and adjustable thermostat control which is accurately calibrated from 80°F to 180°F
- Manually controlled humidity vents are provided in the top of the cabinet
- · Self closing doors with safety stops
- · Heavy-duty cylinder lock and self-adjusting magnetic gasket
- Stainless steel breaker caps
- Cam-lift hinges
- · Six (6) silver freeze shelves
- 6" Adjustable legs standard
- · 8' Cord and plug (see electrical data for details)

OPTIONS & ACCESSORIES

- Pan slides
- · Stainless steel interior
- 3" or 6" Casters
- Left or right door hinge (at time of order)

ELECTRICAL SYSTEM

- 20 AMP breaker required for single door units
- Strip type 750-watt heating elements, operating on 208-240/60/1, having a total of 1500 watts per compartment
- Externally mounted blower system maintains even temperature through out the food zone area


















MODEL	PH2-1S-PT	
EXTERNAL DIMENSIONAL DATA		
Width Overall	52 ½"	
Depth Overall with Handle	38 %"	
Height Overall	84 1/8"	
Number of Doors	4	
Depth with Door Open 90°	84 1/16"	
Door Opening (in)	21 ½" x 54 ¾"	
INTERNAL DIMENSIONAL DATA		
NET Capacity (cubic ft.)	43.3	
Internal Width Overall (in)	48 ½"	
Internal Depth Overall (in)	26"	
Internal Height Overall (in)	56 %"	
Number of Shelves	6	
ELECTRICAL DATA		
Amps	11.3/13.0	
Cabinet Voltage	208-240/60/1	
Total Wattage (Heaters & Fan @240V)	3000	
SHIPPING DATA		
Gross Weight - Crated	509 lbs	
Height - Crated	87"	
Width - Crated	60"	
Depth - Crated	39"	

P-Series Warming Cabinet Model: PH2-1S-PT

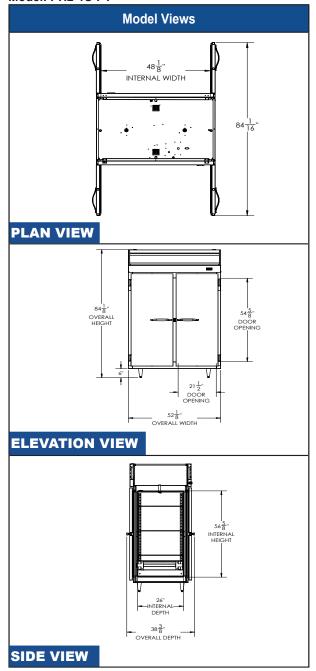



















Unit pre-wired at factory and include 8' long cord and plug set.



