BEVERAGE-A	IR.
------------	-----

Project:	AIA#
ltem:	
Location:	SIS#
Approved:	

## DRAFT BEER EQUIPMENT-DIRECT DRAW DISPENSER

MODEL: DD78HC-1-S

DD78HC Solid Door Dual Tower With Dual Faucets Hydrocarbon Series



# 3 Year Parts/Labor Warranty Additional 4 Year Compressor Warranty

### **CABINET CONSTRUCTION**

- Exterior stainless steel front & doors, gray painted side with galvanized steel back
- Top is made from heavy-duty stainless steel including drip tray
- Interior is galvanized steel on walls and ceiling, reinforced floor is heavy-duty stainless steel
- Full electronic control
- Dual towers with dual faucets
- 3-in-1 Draft solution uses a single stainless-steel tap to serve different beverages, such as wine, beer, and coffee (or other non-alcoholic beverages) through silver-lined, anti-microbial tubing that is 100% effective against the top 4 beverage spoiling bacteria
- 3" Stainless steel insulated dispensing tower
- Drain tube located at bottom front of cooler for connection to floor drain
- Door locks
- Self-closing door with 120° stay-open feature
- Magnetic gaskets provide positive door seal
- Field reversible door (hinge kit not included)
- · Compressor available on left or right, specify at time of unit order

**OPTIONS & ACCESSORIES** 

- Twelve tap tower
- · Stainless steel interior
- Stainless steel back
- Shelves
- Shelf clips
- Custom tower hole location
- Drip tray location option
- Wine models
- Faucet locks
- Glass rinser
- 3"-6" casters or 6" black legs
- 1- 6 Tap tower
- 2, 3 & 4 way manifolds
- Dual tap placement option
- No draft/hole cover option
- Remote option\* (see note on back on page)

### **REFRIGERATION SYSTEM**

- Refrigeration system uses R290 refrigerant to comply with all environmental concerns
- · Automatic, non-electric defrost
- Epoxy coated evaporator coil
- Maintains product temperatures between 36°F and 38°F
















MODEL	DD78HC-1-S	
EXTERNAL DIMENSIONAL DATA		
Width Overall	79"	
Depth Overall	29"	
Height Overall (floor to top of tap)	52 ½"	
Number of Doors	3	
Depth with Door Open 90°	49 <sup>1</sup> / <sub>4</sub> "	
Door Opening (in)	19 ⅓" x 30"	
INTERNAL DIMENSIONAL DATA		
NET Capacity (cubic ft.)	33.59	
Internal Width Overall (in)	66 <sup>1</sup> ⁄ <sub>4</sub> "	
Internal Depth Overall (in)	23 1/8"	
Internal Height Overall (in)	27 <sup>3</sup> /8"	
Number of 1/2 Kegs	4	
ELECTRICAL DATA		
Full Load Amperes	5.5	
REFRIGERATION DATA		
Horsepower*	1/3	
Capacity (BTU/Hr)*	2392	
SHIPPING DATA		
Gross Weight - Crated	400 lbs	
Height - Crated	45"	
Width - Crated	81"	
Depth - Crated	31"	


<sup>\*</sup>NOTE: Remote units are field wired and come with 6" legs. Refrigerant must be specified at time of order.

### DD48/DD50 KEG CAPACITY



2 X 1/6 Keg

**Bar Equipment-Direct Draw Beer Dispenser** Model: DD78HC-1-S

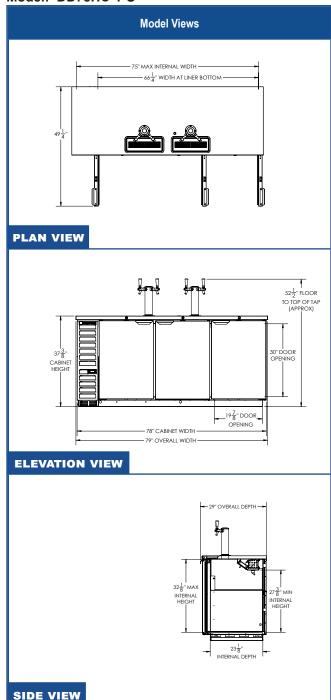













1 X 1/4 Slim

### \*ELECTRICAL CONNECTION



Units pre-wired at factory 115/60/1 NEMA 5-15P and include 8' long cord and plug set.