



**DUKERS**  
Quality Commercial Refrigeration



## GLASS DOOR MERCHANDISER

DSM-32SR

2-Glass Sliding Door Refrigerator



### **i** TECHNICAL SPECIFICATIONS

- Voltage/Frequency  
115V/60Hz
- Refrigerant  
R290
- Type of Defrost  
Automatic
- Interior Finish  
White
- Exterior Finish  
Black
- Temperature Range °F  
33 ~ 40°F
- Compressor Power (HP)  
1/2 & 1/4
- Nema Config.  
NEMA5-15P



### PRODUCT FEATURES

- The compressor is mounted in the bottom for better heat evaporation.
- Digital temperature controls with LED display for precise adjustment and automatic defrosting system.
- Temperature Range 33 ~ 40°F, with auto defrost function, which ensures optimal performance day-in and day-out.
- R290 Natural Refrigerant promotes faster cool down and efficient energy consumption.
- Interior and canopy LED light with switch on the right side to always show your products at their best
- High quality coated stainless adjustable shelves prevent peel and rust.
- Anti-fogging tempered glass door helps ensure a crystal clear view of the interior.



### HIGH QUALITY STAINLESS STEEL & ROBUST DESIGN



**DUKERS**

Los Angeles | San Francisco | Dallas  
Houston | Florida | Chicago | New Jersey

1-800-931-8628


[info@dukersusa.com](mailto:info@dukersusa.com)

[www.DukersUSA.com](http://www.DukersUSA.com)


# DETAILS & SPECIFICATIONS

## DSM-32SR

Front View

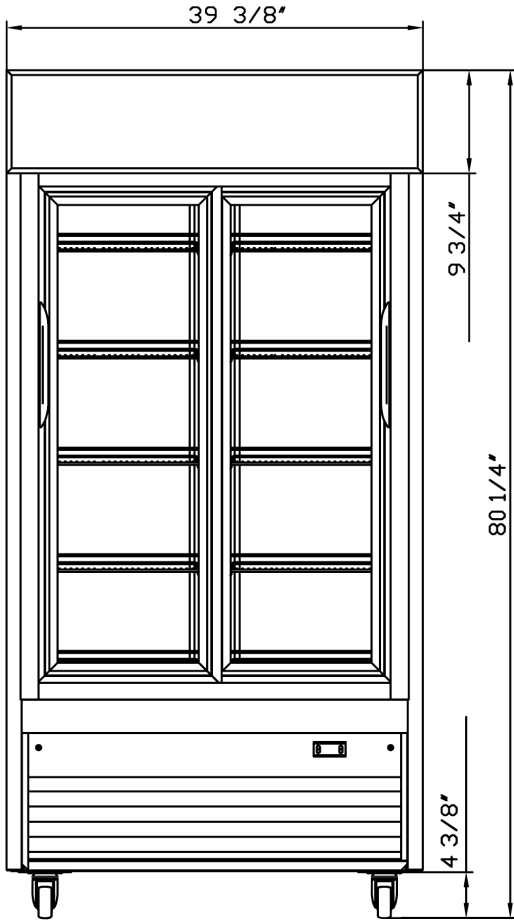

Side View

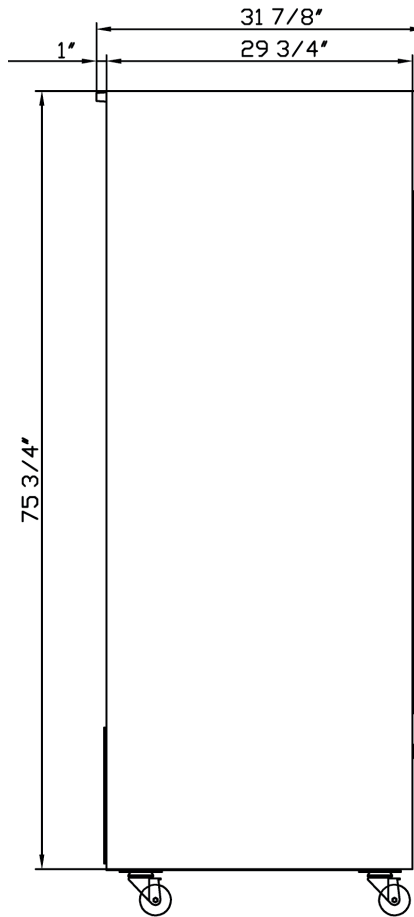

### MODEL DSM-32SR

Rated Voltage	115V
Rated Frequency	60Hz
Total Input Power	430W
Total Current	3.8A
Total Capacity	33.29 cu ft
Climatic Category	4-5
Protection Type	I
Design Pressure High Side	300 PSIG
Design Pressure Low Side	150 PSIG
Insulation Blowing Gas	C-Pentane
Refrigerant	R290/5.11 oz

MODEL	EXTERNAL DIMENSION WXDXH (INCHES)	PACKAGING DIMENSION WXDXH (INCHES)	PRODUCT NET WEIGHT	# OF SHELVES	40HQ CONTAINER CERT.
DSM-32SR	39 3/8 x 31 7/8 x 80 3/8	40 3/4 x 33 x 83 1/4	297 lbs	10	28



Los Angeles | San Francisco | Dallas  
Houston | Florida | Chicago | New Jersey

1-800-931-8628

@ info@dukersusa.com

www.DukersUSA.com