

4184 E. Conant St. Long Beach, CA 90808 Tel. 310-900-1000 Fax. 310-900-1077 www.turboairinc.com

Duck	+	
Pro	IPCT.	
1 10		

Model # : Item # :

Qty :

Available W/H :

Approval :

# **Sliding Door Merchandisers**

## \_\_\_\_ FEATURES & BENEFITS \_\_\_\_

### Hydrocarbon refrigerants (R-290)

With innovative and eco-friendly technology, Turbo Air brings you hydrocarbon refrigerators designed to meet the new standards of the EPA and DOE in 2017. Hydrocarbon refrigerants do not deplete the ozone layer and have very low contribution to global warming (ODP-0, GWP-3).

#### Energy conserving fan control

Utilizing algorithmic air circulation for optimal temperature levels, our innovative fan control system conserves energy by at least 15% and increases compressor life by up to 30%.

### Hot gas condensate system

Through Turbo Air's creative innovation, the condensate system surfaces have been specially treated to resist corrosion. This not only increases efficiency without the risk of refrigerant leakage from corrosion, but also prevents the overflow of condensate water.

#### Double pane glass doors with Low-E glass

Energy saving double pane glass doors are equipped with Low-emissivity glass, which reduces outer heat gain and decreases energy consumption. It enhances energy efficiency and minimizes condensation. Lightweight door construction also reduces door maintenance and bushing wear, which in turn facilitates smoother door opening.

#### High-density polyurethane insulation

The entire cabinet structure and solid doors are foamed-in-place using high density, CFC free polyurethane insulation.

- Adjustable, heavy duty, PE (polyethylene) coated wire shelves
- LED advertising panel LED lighting offers 5 times longer lasting life than fluorescents and conserves energy as well.
- LED lighting interior
- Refrigerator holds 33°F ~ 38°F for the best in beverage preservation

## Model : TGM-69RB-N TGM-69R-N

**Glass Door Merchandisers** 

**Refrigerators** 



			gerant	ISO 9001:2008	c Intertek	Intertek	2 YEAR	WARRANTY (U.S.A only)
#of Shelves	HP	AMPS	-	ated		L /	x D*x H inches)	ł

**681** 

1/2

6.8

CU./FT.

Sliding

Door

Model

\* Depth does not include 3/4" for door handle.

78 x 301/8 x 795/8

# Sliding Door Merchandisers

# Model : TGM-69R(B)-N

ELECTRICAL DATA					
Voltage	115/60/1				
Plug Type	() NEMA 5-15P				
Full Load Amperes	6.8				
Compressor HP	1/2				
Cord Length (ft.)	7				
Refrigerant	R-290				
DIMENSIONAL DATA					
# of Doors	3				
Net Capacity (cu. ft.)	57.6				
Ext. Length Overall (in.)	78 (1981mm)				
Ext. Depth Overall (in.)*	301/8 (767mm)				
Ext. Height Overall (in.)	795/8 (2024mm)				
Int. Length Overall (in.)	743/8 (1890mm)				
Int. Depth Overall (in.)	231/4 (590mm)				
Int. Height Overall (in.)	615/8 (1565mm)				
Net Weight (lbs.)	654				
Gross Weight (lbs.)	681				
# of Shelves	12				
Shelf Size (L x D) (in.)	231/2 x 23				
Bottle Capacity (Full/Load line)	840 / 672				

Design and specifications subject to change without notice.

Actual shipping weight may differ due to extra packing materials for product protection.


\* Depth does not include 3/4" for door handle.

## 2 Year Parts and Labor Warranty Additional 3 Year Warranty on Compressor **WARRANTY**:

- Anti-corrosion coated evaporator
- White color cabinet & black color frame on door
- Black color cabinet available
- 4" dia. casters are available (optional)

#### OPTIONAL ACCESSORIES :

- 4" caster, 1/2" diameter & 13 TPI: G8F6500101 (non-brake), G8F6500201 (w/ brake)
- Additional PE coated wire shelf: 30278K0101

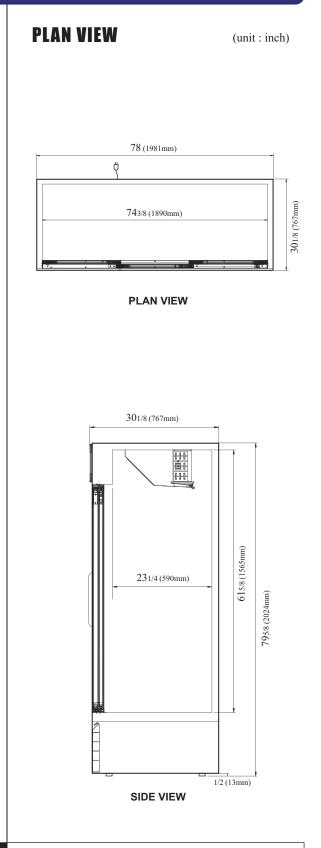

Ver.20171019



- **Turbo Air** : 800-627-0032 **GK** : 800-500-3519
- Warranty : 800-381-7770 AC : 888-900-1002





(GERMAN

