



BEVERAGE-AIR

Project: _____	AIA#
Item: _____	
Location: _____	SIS#
Approved: _____	

FLG24HC BAR EQUIPMENT: GLASS FROSTER SERIES

BAR EQUIPMENT

FLG24HC Solid Door Glass and Plate Froster Hydrocarbon Series

MODEL:
FLG24HC-1-B



3 Year Parts/Labor Warranty
Additional 4 Year Compressor Warranty

CABINET CONSTRUCTION

- Exterior features durable black painted steel
- Interior liner is made of corrosion resistant aluminum
- Stainless steel top
- Front loading
- Full electronic control
- Interior thermometer is standard
- Self closing door with 120° stay open feature, on cartridge style hinges
- Door opening includes low wattage, anti-condensate heaters
- Magnetic gasket for positive seal
- Two (2) epoxy coated shelves standard
- Field reversible door
- Automatic defrost of coil is standard
- Built-in condensate evaporator system
- No floor drain or additional plumbing

OPTIONS & ACCESSORIES

- Stainless steel back
- Stainless steel interior
- Remote option*
(refrigerant must be specified at time of order, see note on back on page)

REFRIGERATION SYSTEM

- Refrigeration system uses R290 refrigerant to comply with all environmental concerns
- Automatic, electric defrost
- Epoxy coated evaporator coil
- Chills glasses and plates at 0°F and below (factory setpoint is 0°F)



Please verify qualifying units by visiting:
www.energystar.gov/cfs

3779 Champion Blvd., Winston-Salem, NC 27105
1-888-845-9800 Fax: 1-336-245-6453
Beverage-Air.com Sales@bevair.com




BEVERAGE-AIR

Bar Equipment - Glass and Plate Froster Model: FLG24HC-1-B


MODEL	FLG24HC-1-B
EXTERNAL DIMENSIONAL DATA	
Width Overall	24"
Depth Overall with Handle	30 1/8"
Height Overall	32"
Number of Doors	1
Door Opening 90°	50 5/8"
Door Opening (in)	19 5/8" x 21 5/8"
INTERNAL DIMENSIONAL DATA	
NET Capacity (cubic ft.)	5.06
Internal Width Overall (in)	20"
Internal Depth Useable (in)	18 1/4"
Internal Height Overall (in)	23"
Number of Shelves	2
12 oz. Mugs Chilling Capacity	80
8" Plate Chilling Capacity	100
ELECTRICAL DATA	
Full Load Amperes	2.5
REFRIGERATION DATA	
Horsepower	1/4
Capacity (BTU/Hr)	858
Heat Rejection (BTU/Hr)	1287
Charge (lbs/grams)	0.0992/45
SHIPPING DATA	
Gross Weight - Crated	208 lbs
Height - Crated	45"
Width - Crated	30"
Depth - Crated	32"

*NOTE: Remote units are field wired and come with 6" legs.
Refrigerant must be specified at time of order.


Model Views

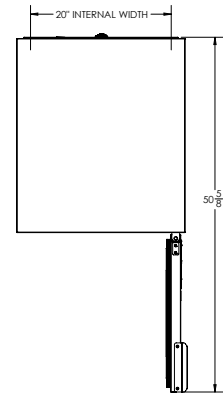

PLAN VIEW



ELEVATION VIEW

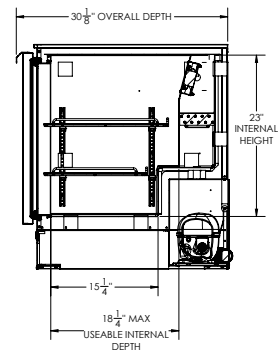

SIDE VIEW

ELECTRICAL CONNECTION



115/60/1
NEMA 5-15P

Units pre-wired at factory
and include 8' long cord
and plug set.



3779 Champion Blvd., Winston-Salem, NC 27105 1-888-845-9800 Fax: 1-336-245-6453 Beverage-Air.com Sales@beveair.com

an Ali Group Company



The Spirit of Excellence